

Broadcast Feeder/Players





BR-D51E



BR-D50E



12

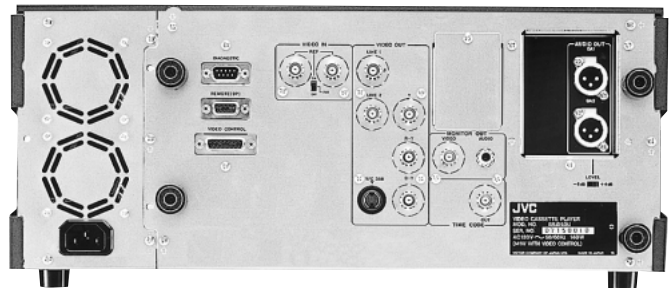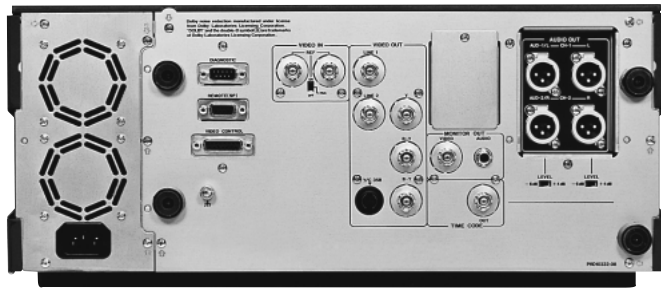

BR-D51E: S-VHS compatible

- 3-hour S-VHS playback
- Two S-VHS Hi-Fi audio plus two S-VHS normal audio channel outputs

Both BR-D51E and BR-D50E

- Editing Feeder/Players
- High quality 50 Mbps, 8-bit, 4:2:2 D-9 playback
- 2-hour (124 minutes) playback time with DS-124 cassette
- $\pm 1/3$ variable speed playback (field / frame selectable) in D-9 mode
- Jog/shuttle control
- Analogue I/O: Composite, Y/C, Component (Y, R-Y, B-Y)
- Two 16 bit 48 kHz PCM audio channels
- Two D-9 cue audio tracks for precise audio editing
- Front panel TBC adjustment of System, SC and video phases
- Remote TBC adjustment via 15-pin D-Sub connector including video level, chroma level, and pedestal level
- RS-422A standard editing and control with external editing controllers
- RS-232C serial port for diagnostics
- LTC/VITC time code
- Rugged die cast chassis using ceramic tape guide rollers and sapphire flanges for long life
- Centre rotating head design for long head life

Options

- SA-D50U: Optional SMPTE 259U serial digital output and optional AES/EBU serial audio output
- SA-K67U: Rack mount
- RM-G22U: TBC remote control unit



SA-D50U
Serial Digital Interface

SA-K67U
D-9 Series Rack
Mount

